




PBR PANEL SPECIFICATIONS

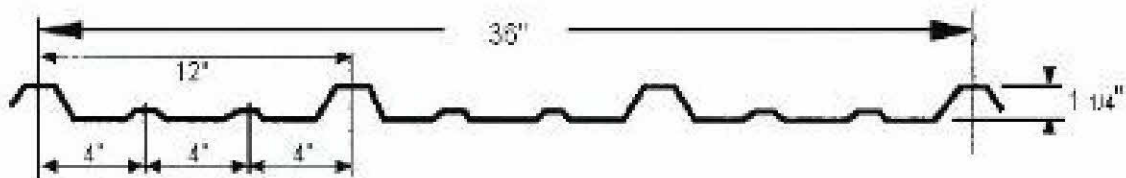

Panel Overview:

- Available in a selection of eight colors (40 yr siliconized polyester paint system)
- Also available in a 25 year acrylic coated galvalume.
- 26 gauge standard.
- 36” actual panel coverage.
- 1 ¼” tall trapezoidal ribs on 12” centers.
- Exposed fastening system
- Applies over open framing or solid substrate
- Minimum recommended roof slope: 1:12
- Minimum factory cut length is 3’ 0”. Maximum recommended length is 40’ 0”.

Total Uniform Loads - PSF For Continuous Three Span							
Gauge	Condition	Span - Foot					
		3' 0"	4' 0"	5' 0"	6' 0"	7' 0"	8' 0"
26	Stress Load	150	84	56	39	28	22
26	Deflection Load	150	84	51	29	18	12

Section Properties per Foot							
Gauge	Weight (PSF)	Top in Compression			Bottom in Compression		
		+I in .4	+S in.3	+M in kips	+I in .4	+S in.3	+M in kips
26	0.9	0.035	0.033	1.2	0.042	0.049	1.748